# Bernard<sup>®</sup> Shortstub<sup>™</sup> Stick Electrode Holder

Quick Specs

**Capacity** 400 amps at 60% duty cycle

Electrode Size 1/16" - 1/4" (1.6 mm - 6.4 mm)

e Weight 17oz im) (481 g) **Length** 8 3/4" (22 cm)

### Cable Connection Model "B" large ball point screw connection

**Cable Socket** 19/32" (1.5 cm)

# Bernard's Shortstub stick electrode holder has maintained its time-tested design for decades.

Electrodes can be used to within one inch of the high heat, high impact head compared with the normal three inches of the electrode that is leftover when using a typical tong-type holder.

Bernard Shortstub greatly improves productivity because it is designed for quick, easy installation of electrodes and it is built to last with a proven high impact, high heat replaceable head.

Over 2,000 pounds of gripping pressure enables the electrode to be bent to a desired shape for access to difficult welds.








#### Bernard

A Division of Miller Electric Mfg. LLC. 449 West Corning Road Beecher, Illinois 60401 USA Phone: 1-855-MIGWELD (644-9353) (US & Canada only) 1-519-737-3000 (International) Fax: 708-946-6726 For more information, visit us at Tregaskiss.com

# **Replacement Parts List**

## 40B Shortstub<sup>\*\*</sup>

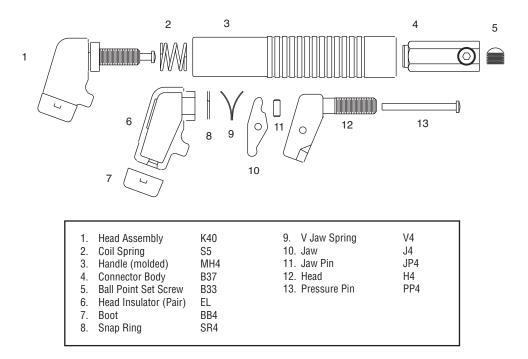

Brand and product names shown above are trademarks of their respective owners.

Subject to Change – The information presented in this spec sheet is accurate to the best of our knowledge at the time of printing. Please visit Tregaskiss.com for the most up-to-date information.

**Distributed By:** 

