

Necks


MIG Welding Accessory

Issued Jan. 2013 • Index No. SPEC N-1.3

The Right Tool for the Job.

To improve comfort and minimize downtime, we offer a wide variety of interchangeable necks for greater flexibility and better weld puddle visibility.

Bernard Neck and components for both fixed and rotatable options.

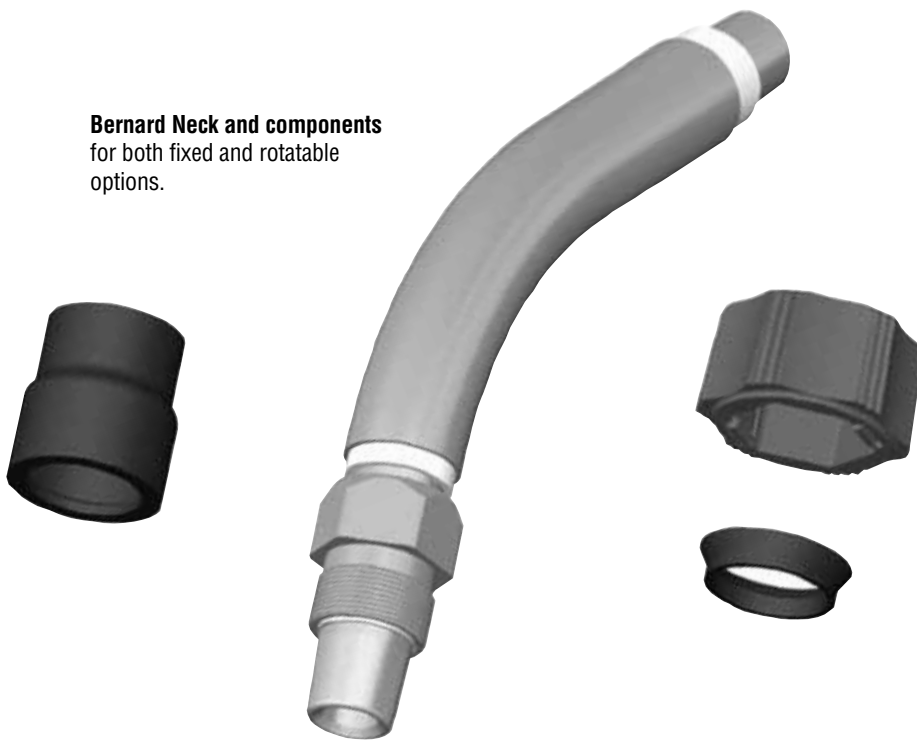

Polished aluminum armor on all necks (excluding flex necks) is 35% thicker than previously used brass armor for increased durability with no weight penalty.

Fixed and rotatable necks fit all Q-Gun™ and S-Gun™ Series - from 150 - 600 amp.

Rotatable necks changeover and rotate without tools.

Large tapered Stay-Tite™ Technology gun connection improves conductivity for better weld quality, lessens heat to increase operator comfort.

Available in multiple lengths and bends for limited access positions and improved operator comfort.

Easily removable for Jump Liner changeover.

Stay-Tite™ Technology

Long-lasting power cable compression fittings and necks with large tapered gun connections combine to form the foundation of Bernard Stay-Tite™ Technology. This technology ensures optimal conductivity to increase weld consistency and lessen heat output while improving product durability.

Made with
Pride and without
Compromise in the **USA**


Bernard

An Illinois Tool Works Company
449 West Corning Road, Box 667
Beecher, Illinois 60401 USA




Phone: 800-946-2281 (US Only) 708-946-2281 (Outside US)
Fax: 708-946-6726
For more information, visit us at BernardWelds.com



Available Necks

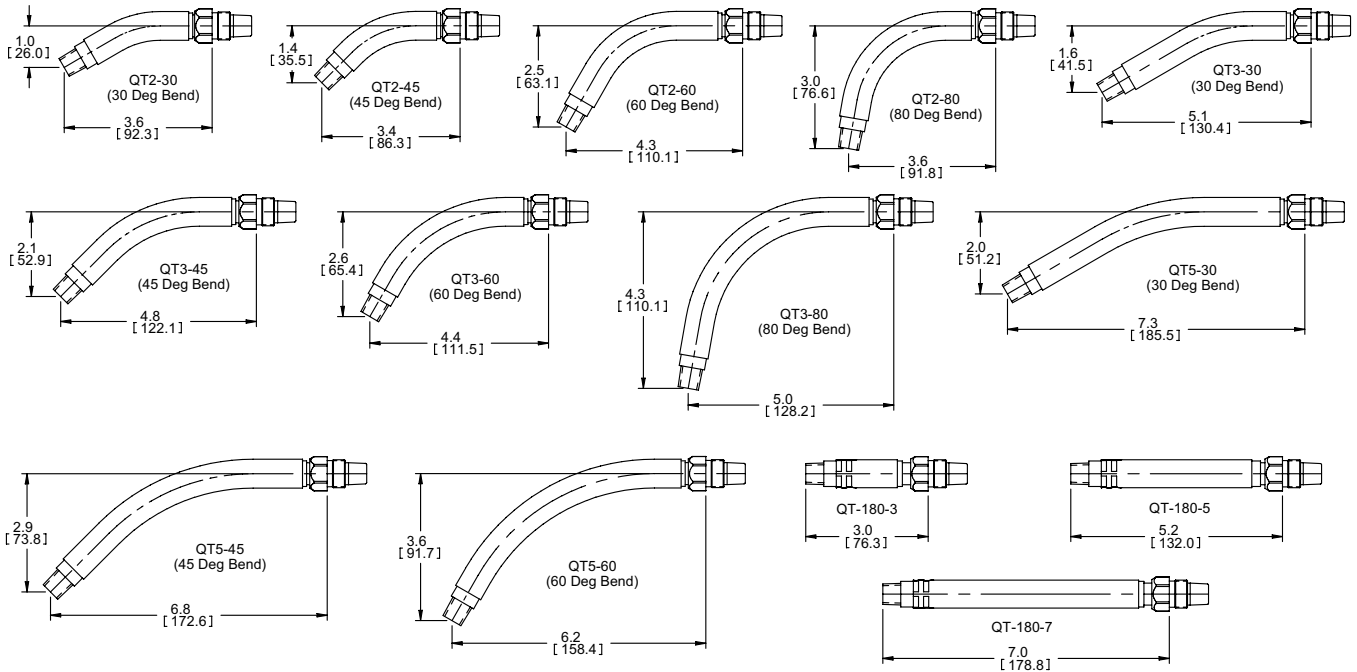

Notes: Dimensions in brackets are in millimeters. Diffuser thread size: 1/4-18 NPT "Bernard Special".



All Necks (except Flex Necks QT-F-6 and QT-F-8) include the components required to make the neck fixed (wrench-tight) or rotatable (hand-tight).

1840057
1840031
4780

